

Series  
M60/M125/M250/M500



CE IP54

**Total Reliability - Advanced Diagnostics, Unrivaled Output Pressure, Wide Temp Capability.**



# Pulsarlube M

## Features & Advantages

### Cost Savings

Substantial savings from the use of replaceable grease pouches and battery packs (Service Pack)

### Remote Installation

High output pressure (30bar) enables remote installation up to 10m (33ft)

### Multi-Point Installation

Up to 8 lube points using Ø6 tube, Max. 6m (20ft) per point

### Simple Operation

Easy to program with built-in LCD and simple button controls

### Convenient Maintenance

Transparent container for easy visual inspection of remaining lubricant

### Other Features


- ▶ Various dispensing settings & grease pouch volumes to suit a wide range of industrial applications
- ▶ Auto Lock Out mode to prevent unintentional mode changes
- ▶ Easy to install in hazardous & confined areas

## Typical Industries and Applications



- Automotive plants, iron/steel mills and nuclear power plants
- Cleanrooms & LM Guides where precise, multi-point lubrication is needed
- HVAC equipment & cooling towers where long lube lines may be necessary
- Motors and pumps in city water & wastewater treatment facilities
- Any places with extreme (low or high) temperature

## Overview

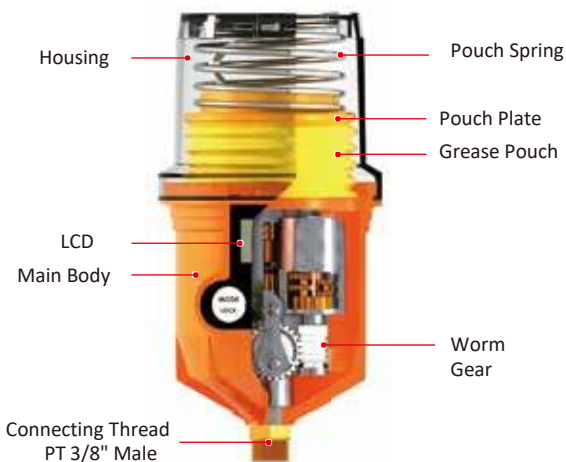

## Product Specifications

### Grease Pouch Capacity

60ml / 500ml (pre-set) 125ml / 250ml  
(capacity setting available)

### Power Supply

DC 4.5V Battery Pack (replaceable)  
Standard : Alkaline Battery  
Optional : Lithium Battery

### Operating Pressure

30 ~ 60bar (435 ~ 870psi)

### Operating Temperature

Standard Alkaline Battery :  
-15°C ~ 60°C (5°F ~ 140°F)  
Optional Lithium Battery :  
-40°C ~ 60°C (-40°F ~ 140°F)

### Dispensing Periods

60ml : 1 ~ 12 month  
125ml / 250ml : 1, 2, 3, 6, 12 month & H (15 days)  
500ml : 1, 2, 4, 6, 12, 18, 24 month & H (15 days)

### Single Point Remote Installation

Max. 10m (33ft) with Ø6 tube

### Multi-Point Installation

Max. 6m (20ft) with Ø6 tube (Up to 8 lube points)

### Dispensing Volume Size

0.34ml/stroke (@20°C/68°F)

### Product Certifications & IP Code

CE / IP54

Exclusive Distributor

LUBE TECH VIETNAM CO.,LTD / [www.lubetech.com.vn](http://www.lubetech.com.vn)